



New LED backlight strips for PanelView 1000E, 2711-NL6 Ser B & NL10 Ser F for Color




Original HMI of Allen-Bradley PanelView 1000 with 2711-NL6 & NL10 Color Terminal. AB PV 1000 (2711-K10C8, SER B, REV D)

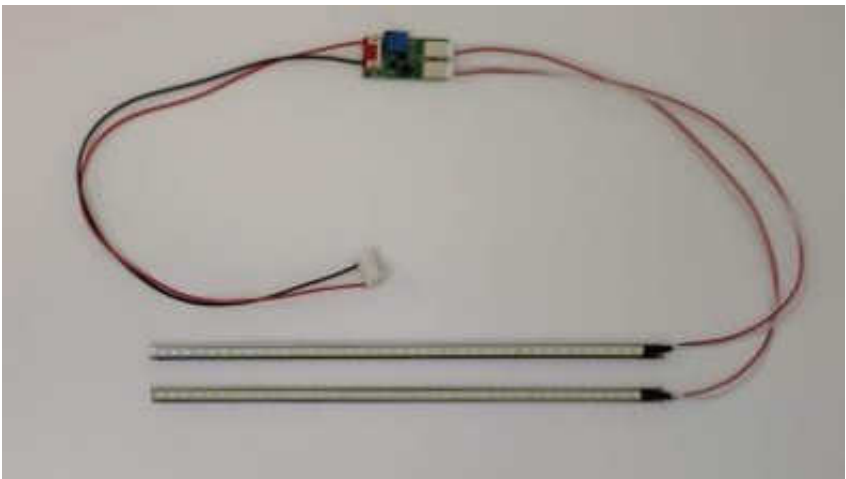


**Remove back cover
(4 screws).**

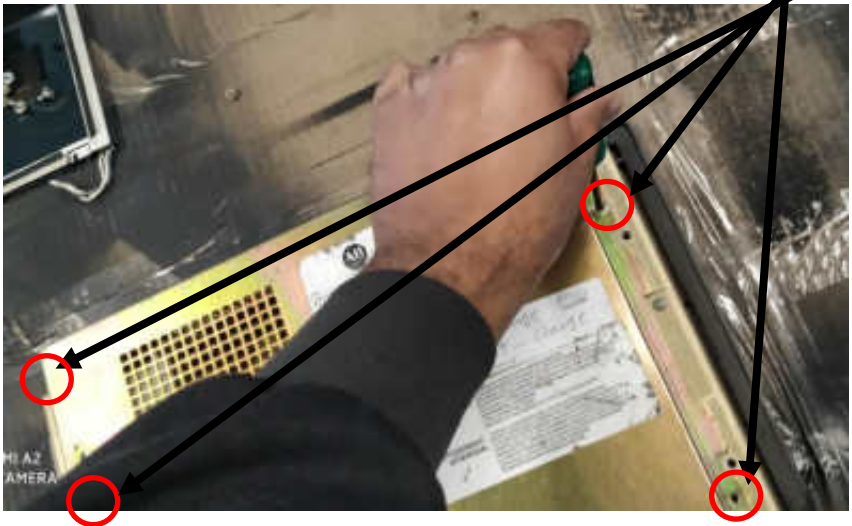


Unscrew these
(4 screws).

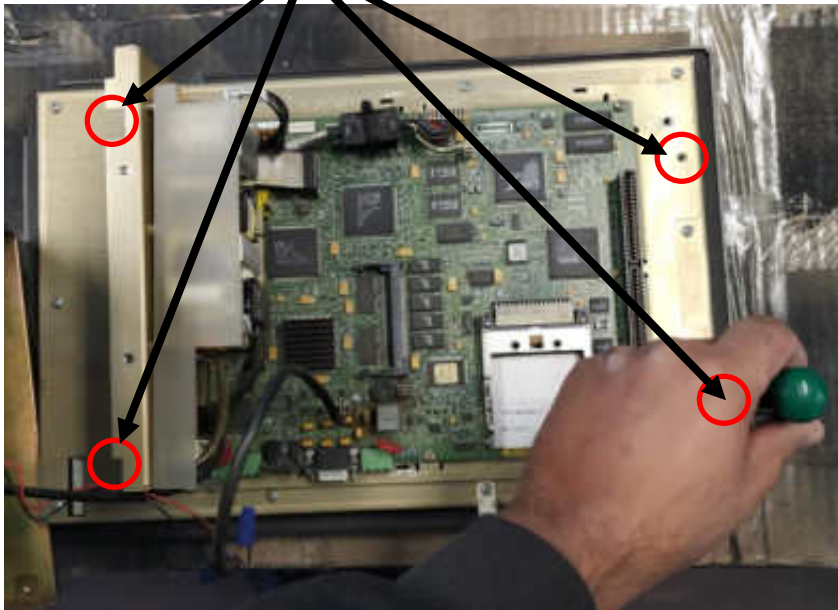

REMOVE THE INVERTER OF THE CCFLS BULBS AND DISCONNECT THE 6 PIN WHITE CONNETER ON THE POWER SUPPLY BOARD.

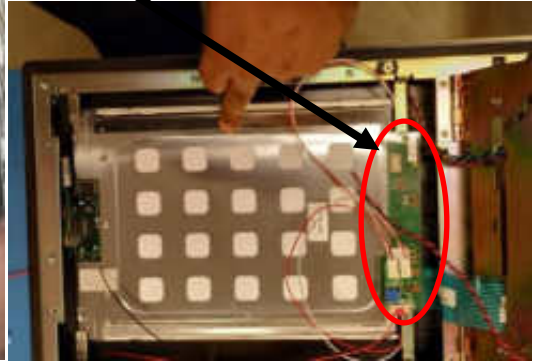



**Unscrew the metal shields holding the CCFLs in the LCD Panel.
Then remove the CCFLs out of the LCD Panel.**

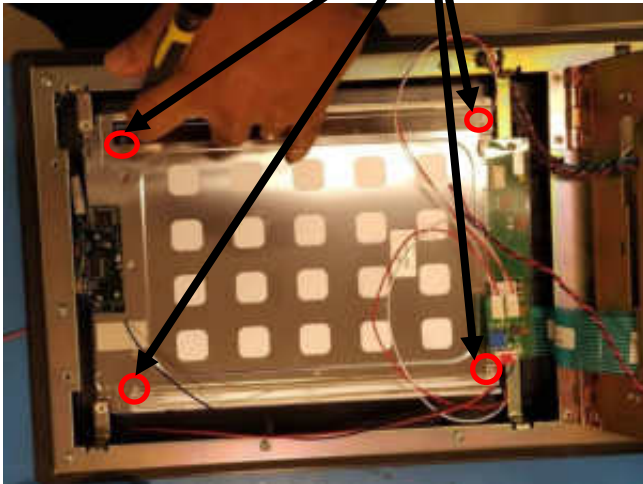


**Keep
this.**




Put the New Monitech LEDs into the slots where the old CCFL Backlight were. Place the shield back on and screw it in.

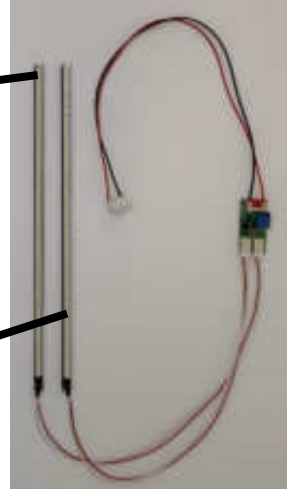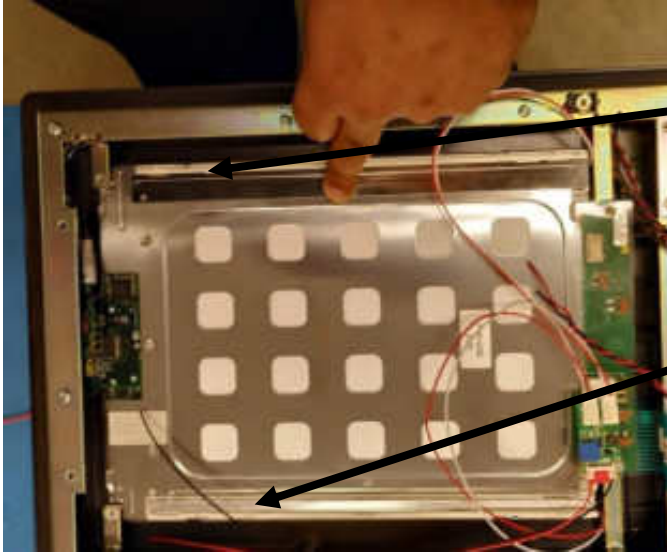


Mount the Inverter Board on to one of the screw holes that was mounting the old Inverter in place. Use the Nylon Screw and Nut the mount it.

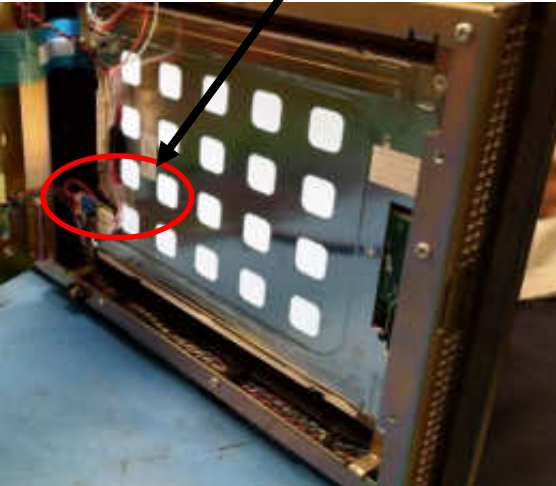

Feed the other side of the inverter cable through the hinge metal part.

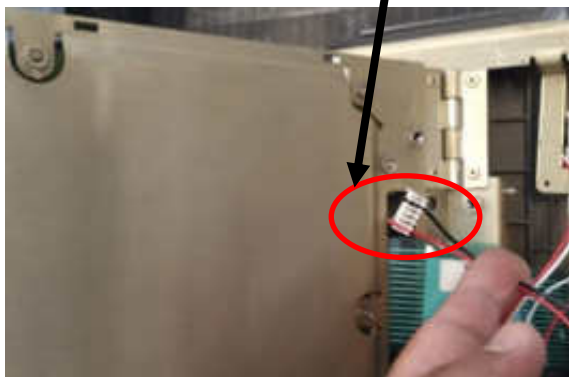

Connect our power adaptor cable to this connector on your controller board.

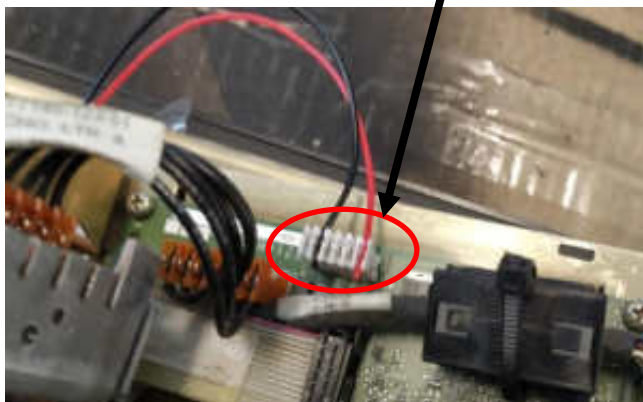

**REPEAT STEPS #1 & 2, IN REVERSE TO ASSEMBLE EVERYTHING BACK INTO PLACE. TEST THE LIGHTS BY GIVING THE AB PANELVIEW TERMINAL 110-240 AC POWER.
NOW YOU CAN SEE !!!.**

Enjoy your rejuvenated Monitor.
Call us to order more HMI replacement parts.

Keep your AB PanelView's up and running!



Replacement: LCD's, Backlight's, Keypad's & Touchscreen's for the whole 550 line.



Replacement: LCD's, Backlight's, Keypad's & Touchscreen's for the whole 600 line.



Replacement: LCD's, Backlight's, Keypad's & Touchscreen's for the whole 900 line.



Replacement: LCD's, Backlight's, Keypad's & Touchscreen's for the whole 1000 line.



Replacement: CRT TO LCD
CONVERSION's, Backlight's, Keypad's &
Touchscreen's for the whole 1200 line.



Replacement: CRT TO LCD
CONVERSION's, Backlight's, Keypad's &
Touchscreen's for the whole 1400 line.

For Technical Support, Call
1-877-493-6105
Support@Monitech.com

MONITECH
PRACTICAL SOLUTIONS FOR INDUSTRIAL DISPLAYS
20 Howard Place
Kitchener, Ontario N2K 4Z4
CANADA 519.725.2222
www.monitech.com

